




L-Square . Straight Knurled (LS.SK)
with Modern Rosette

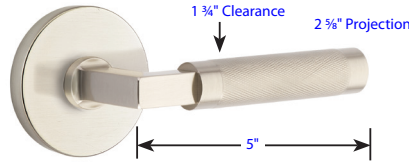


L-Square . Knurled (LS.KN)
with Disk Rosette

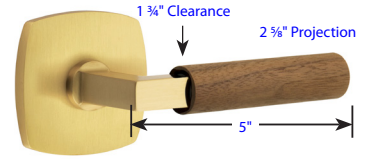


L-Square . Dark Walnut (LS.WNWD)
with Urban Modern

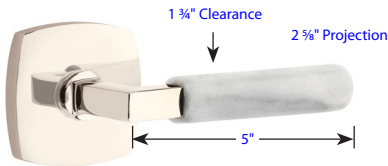


L-Square . White Marble (LS.MRWH)
with Urban Modern Rosette

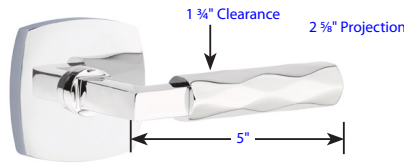


L-Square . Tribeca (LS.TR)
with Urban Modern Rosette

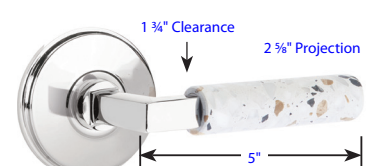


L-Square . Terrazzo (LS.TZLT)
with Disk Rosette

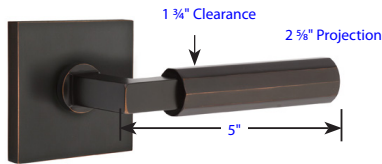


L-Square . Faceted (LS.FA)
with Square Rosette

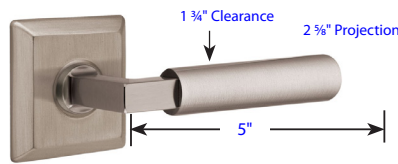

L-Square . Smooth (LS.SM)
with Quincy Rosette

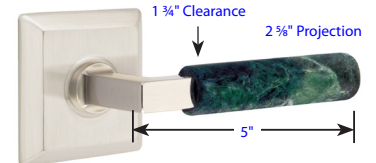

L-Square . Green Marble (LS.MRGN)
with Quincy Rosette

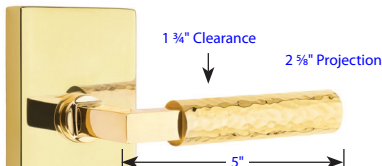

L-Square . Hammered (LS.HA)
with Modern Rectangular Rosette


See page 7 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

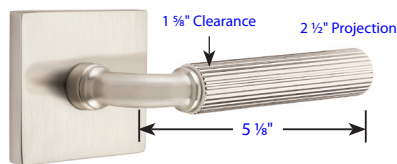


R-Bar . Straight Knurled (RA.SK)
with Square Rosette

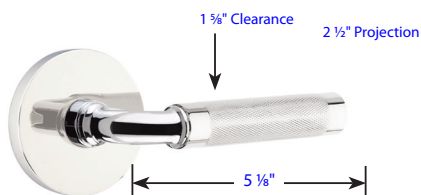


R-Bar . Knurled (RA.KN)
with Disk Rosette




R-Bar . Hammered (RA.HA)
with Neos Rosette

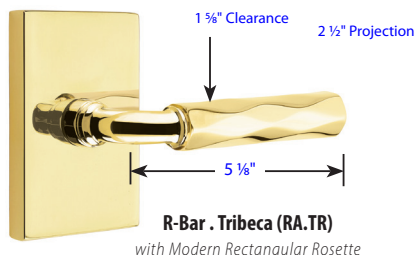


R-Bar . Tribeca (RA.TR)
with Modern Rectangular Rosette

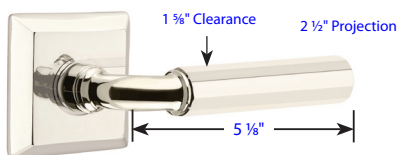


R-Bar . Faceted (RA.FA)
with Quincy Rosette

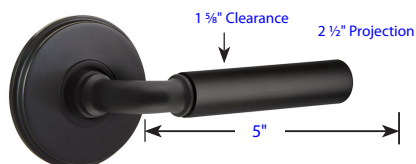


R-Bar . Smooth (RASM)
with Watford Rosette

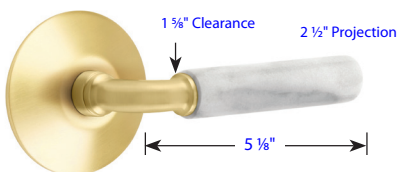


R-Bar . White Marble (RA.MRWH)
with Modern Rosette

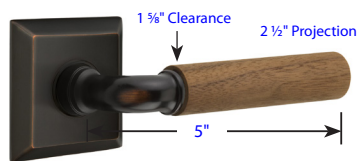

R-Bar . Dark Walnut (RA.WNWD)
with Quincy Rosette

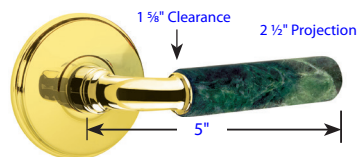

R-Bar . Green Marble (RA.MRGN)
with Disk Rosette

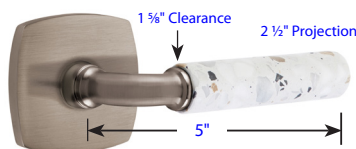

R-Bar . Terrazzo (RA.TZLT)
with Urban Modern Rosette


See page 7 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate




T-Bar . Straight Knurled (TA.SK)
with Quincy Rosette

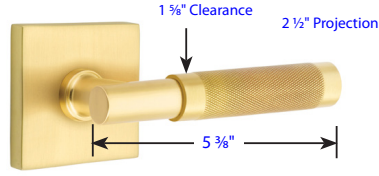


T-Bar . Knurled (TA.KN)
with Square Rosette

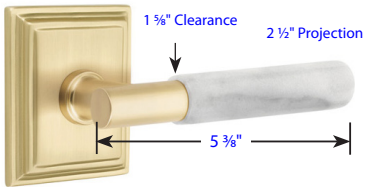


T-Bar . White Marble (TA.MRWH)
with Wilshire Rosette

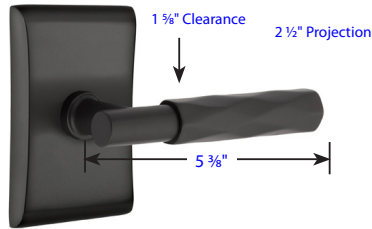


T-Bar . Tribeca (TA.TR)
with Neos Rosette

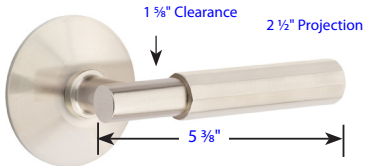


T-Bar . Faceted (TA.FA)
with Modern Rosette

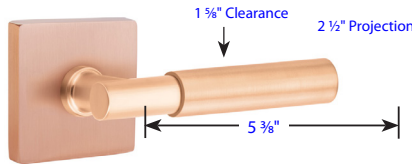


T-Bar . Smooth (TASM)
with Square Rosette

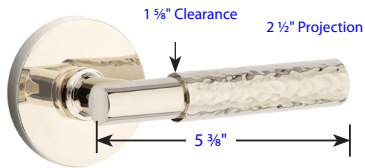

T-Bar . Hammered (TA.HA)
with Disk Rosette

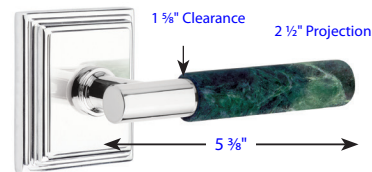

T-Bar . Green Marble (TA.MRGN)
with Wilshire Rosette



T-Bar . Dark Walnut (TA.WNWD)
with Disk Rosette



T-Bar . Terrazzo (TA.TZLT)
with Watford Rosette


See page 7 for rosette specification.

Door Thickness Specifications

- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate


- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

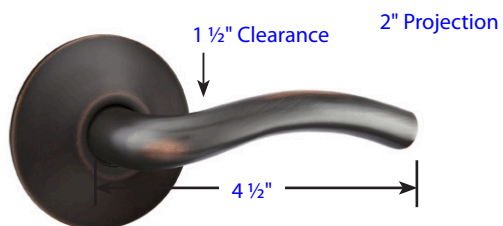


Aireon (A)

with Modern Rosette
DISCONTINUED

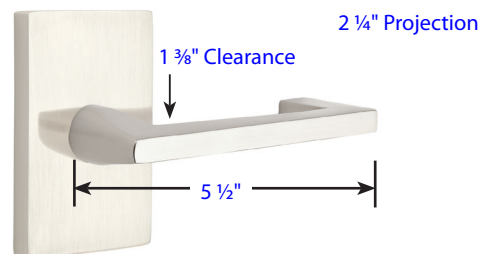


Argos (AG)

with Modern Rectangular Rosette

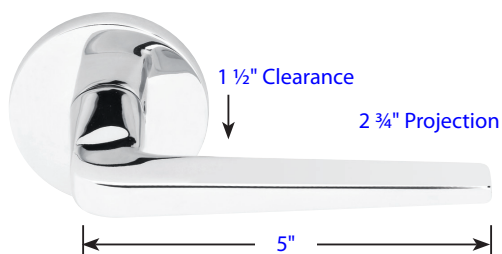


Athena (ATN)

with Disk Rosette

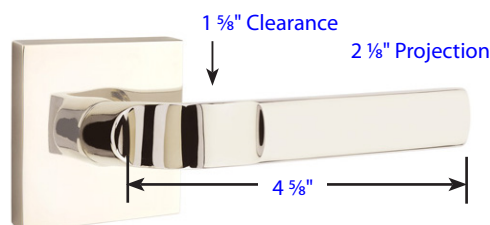


Aston (AST)

with Square Rosette

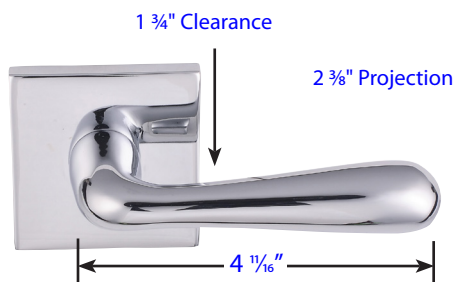

Basel (BA)

with Square Rosette

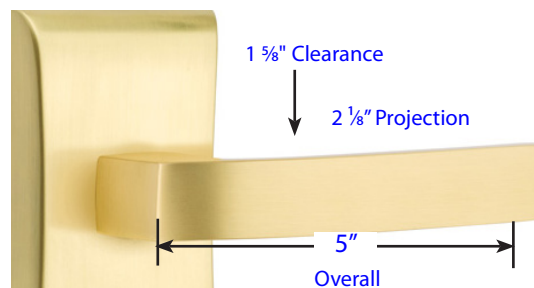

Breslin (BRL)

with Neos Rosette


See page 7 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

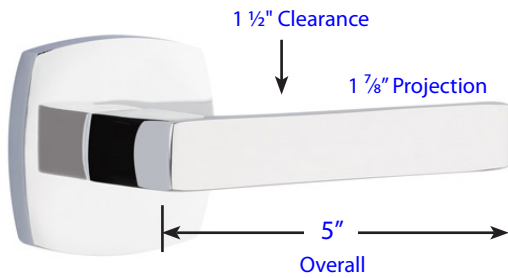


Dumont (DT)
with Urban Modern Rosette

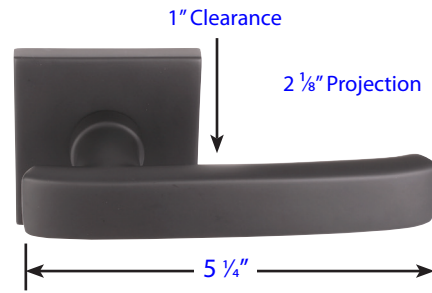


Geneva (GV)
with Square Rosette

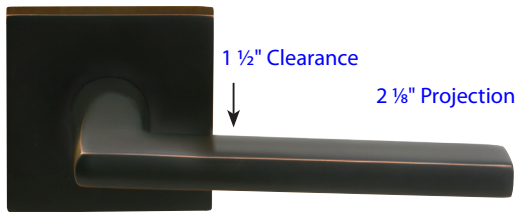


Helios (HLO)
with Square Rosette

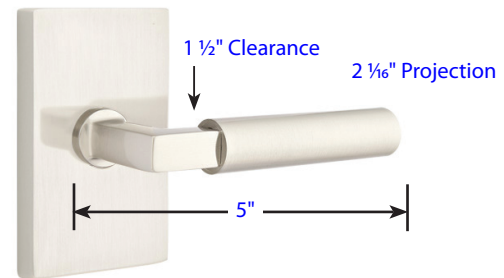

Hercules (HEC)
with Modern Rectangular Rosette

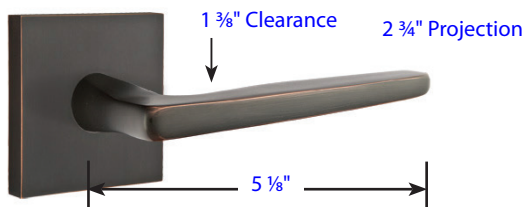

Hermes (HER)
with Square Rosette

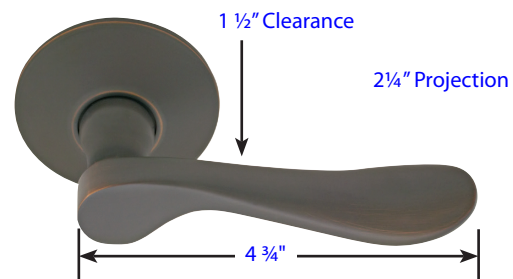

Luzern (LU)
with Modern Rosette


See page 7 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

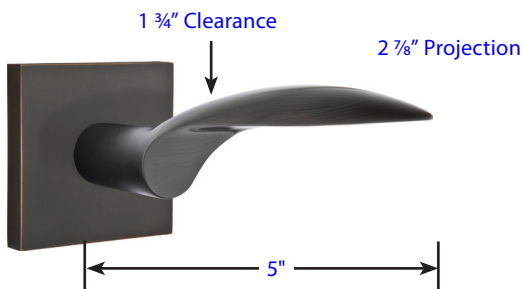


Mercury (MC)
with Square Rosette

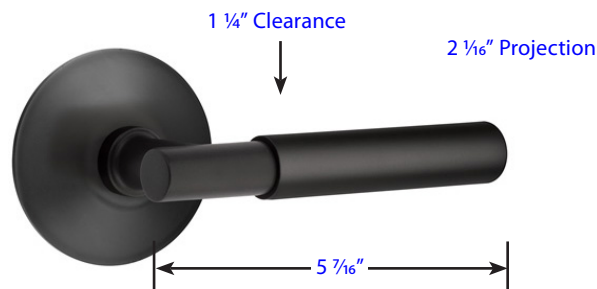


Myles (MYL)
with Modern Rosette

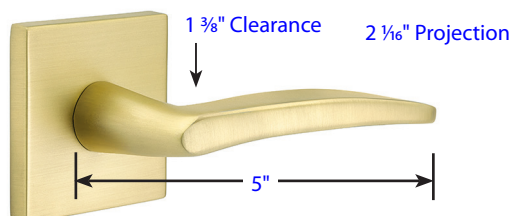

Poseidon (POS)
with Square Rosette

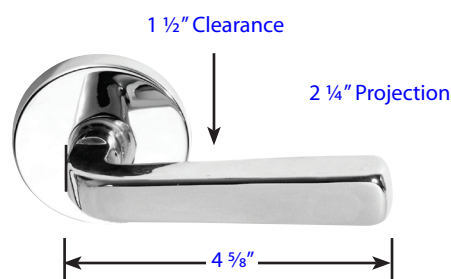

Sion (SIO)
with Disk Rosette

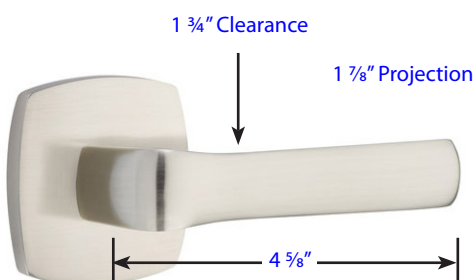

Spencer (SPN)
with Urban Modern Rosette



Stuttgart (STU)
with Disk Rosette


See page 7 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

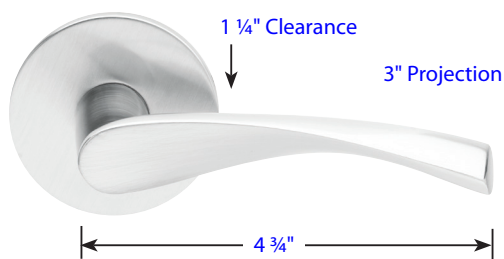

Triton (TRT)
with Disk Rosette

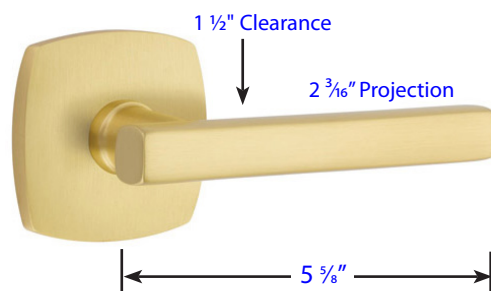

**Urban Modern
Freestone (FRL)**
with Urban Modern Rosette

Rosettes

3/8" Thick

Disk



2 1/2" Dia.

Urban Modern



2 1/2" x 2 1/2"

Quincy



2 1/2" x 2 1/2"

Modern
Rectangular



2 1/2" x 4"

Oval Stretto



1 1/2" x 3"

Square



2 1/2" x 2 1/2"

Watford



2 1/2" Dia.

Stretto



1 1/2" x 5"

7/16" Thick

Wilshire



3" x 2 1/2"

1/2" Thick

Modern



2 3/4" Dia.

Neos









2 5/8" x 4"

Door Thickness Specifications

- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

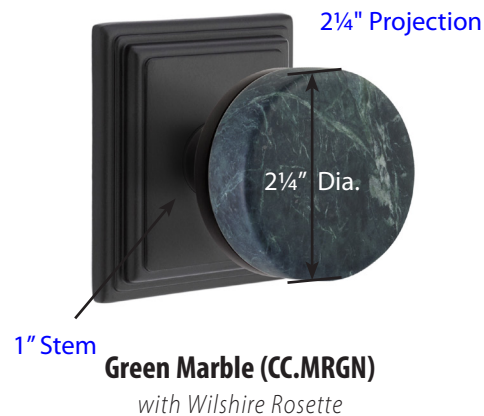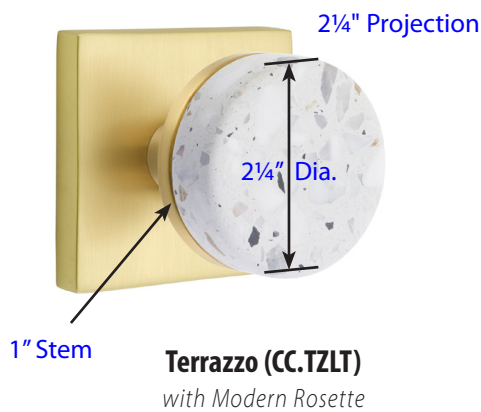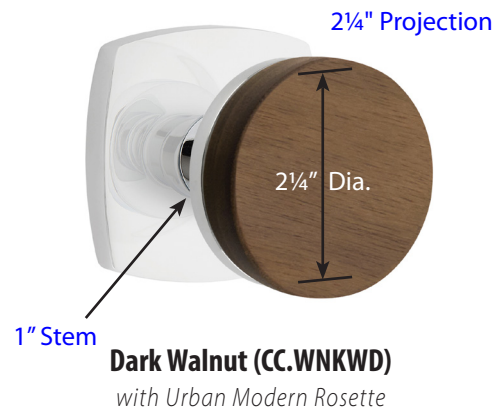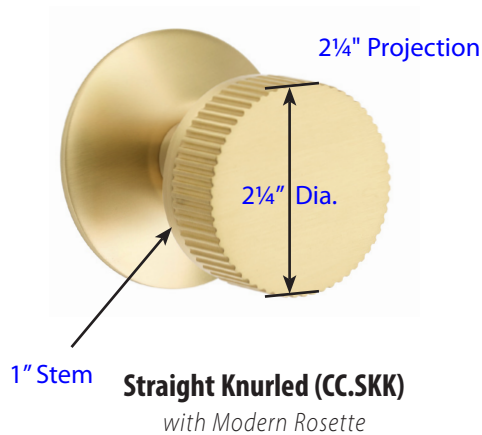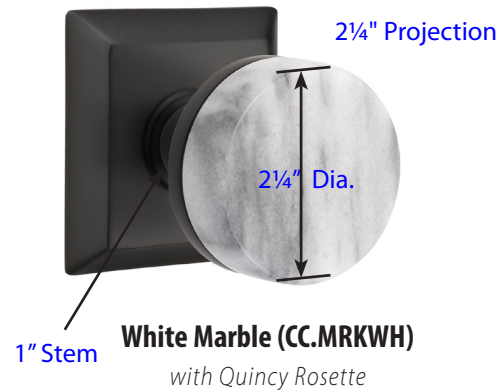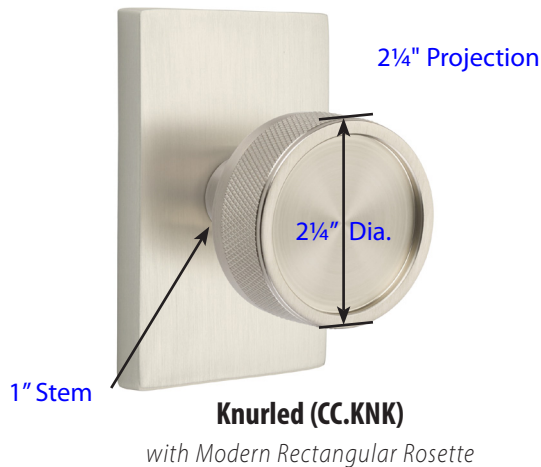


See page 7 for rosette specification.

Door Thickness Specifications

- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

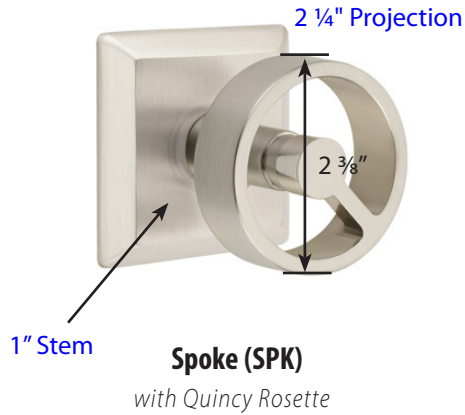


See page ____ for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1¼" - 1¾"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1½" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 1⅞" - 2½"
- Extended Components:
- See priv pin table (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws & 2½" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2⅝" - 3"
- Extended Components:
- See priv pin table (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2½" Rosette Screws
- Extended Full-Lip Strike Plate

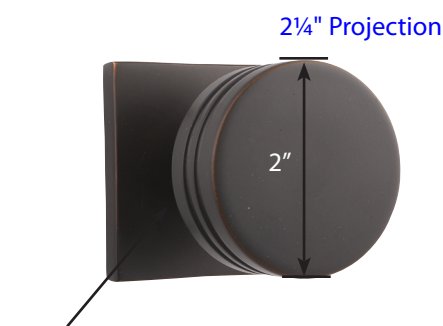


Bern (BN)
with Square Rosette

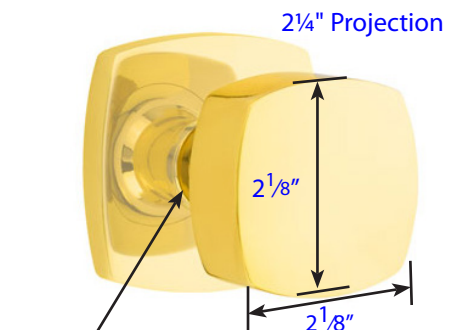


Urban Modern Freestone (FRK)
with Urban Modern Rosette




Laurent (LAU)
with Modern Rectangular Rosette

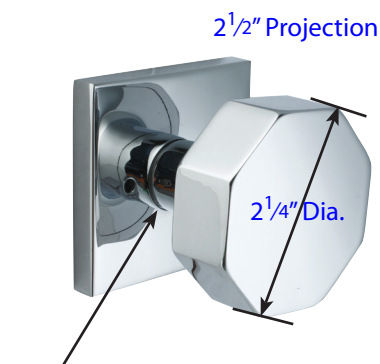


Octagon (OCT)
with Square Rosette

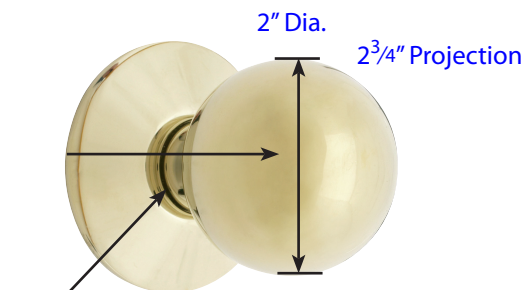


Orb (OR)
with Modern Rosette

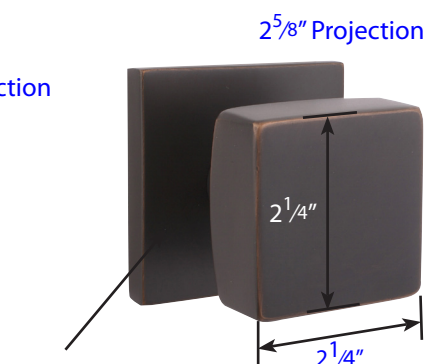

Square (SQU)
with Square Rosette

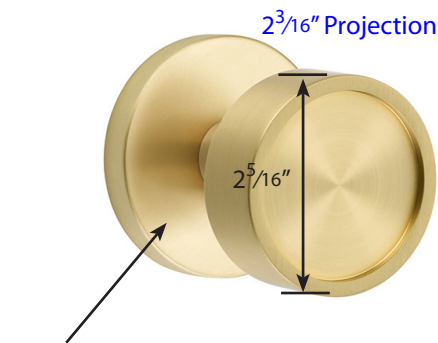

Verve (VR)
with Disk Rosette

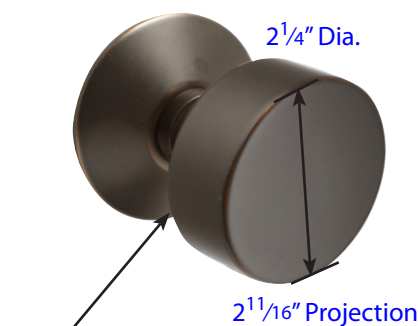

Round (ROU)
with Modern Rosette

See page 7 for rosette specification.

Door Thickness Specifications

• Standard Door Thickness: 1 1/4" - 2"
Standard Components:


- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

• **Extended** Door Thickness: 2" - 2 1/2"
Extended Components:


- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

• **Extended** Door Thickness: 2 1/2" - 3"
Extended Components:


- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

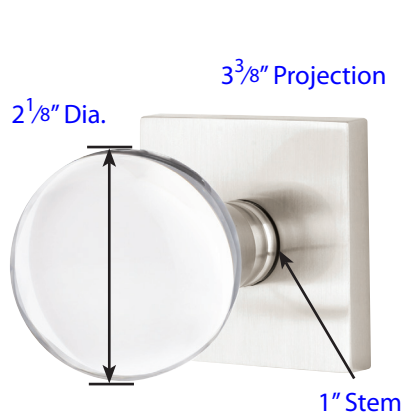


Bristol - Modern (BL)
with Square Rosette

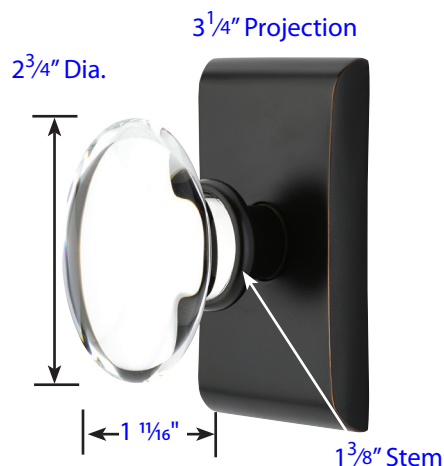


Hampton - Modern (HT)
with Neos Rosette

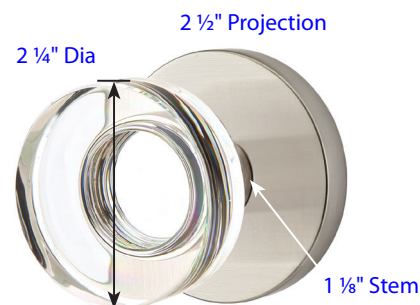

Modern Disc Crystal (MDC)
with Disk Rosette

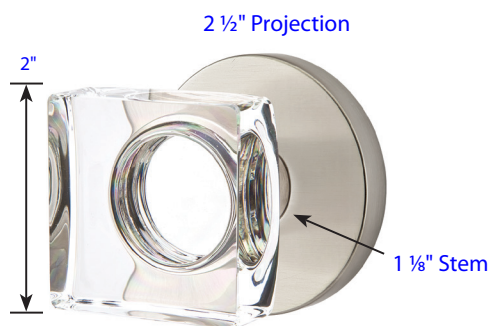

Modern Square Crystal (MSC)
with Disk Rosette

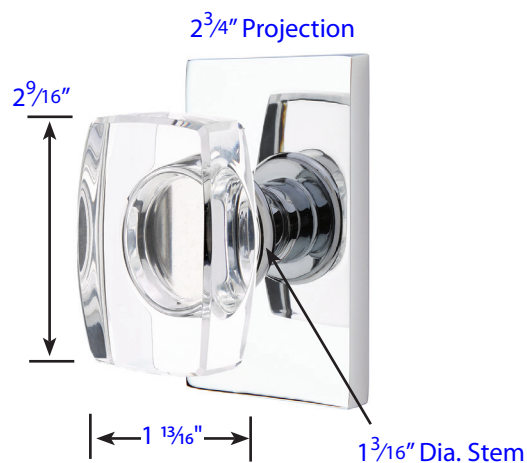

Windsor - Modern (WS)
with Modern Rectangular Rosette

See page 7 rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1-1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2-1/2" Rosette Screws
- Extended Full-Lip Strike Plate




Athena (AT)
with Square Rosette

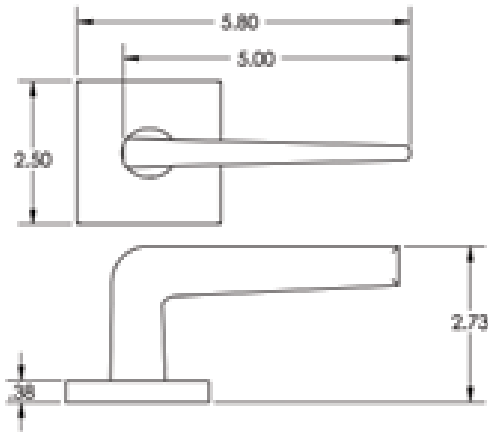

Clearance 1 1/2"




Cologne (CO)
with Disk Rosette

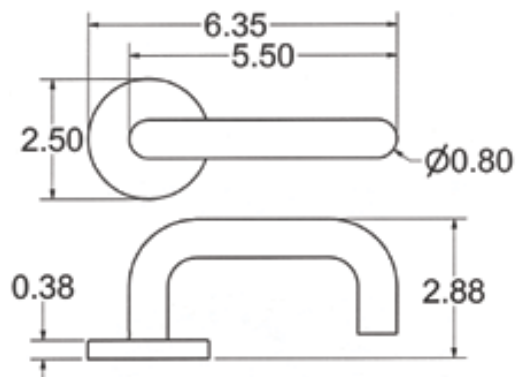

Clearance 1 5/8"



Dresden (DD)
with Square Rosette

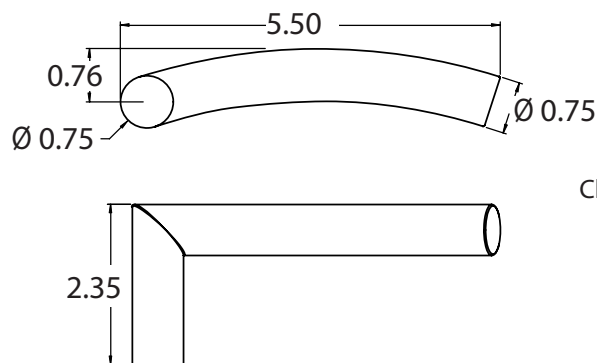

Clearance 1 5/16"




See page 16 for rosette specification.

Door Thickness Specifications

- Standard Door Thickness: 1 3/8" - 2"
- Standard Components:
 - Privacy Pin (for privacy sets)
 - Inside Passage Half Spindle
 - 1 1/2" Socket Head Machine Screws
 - Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
 - Privacy Pin w/ Extension (for privacy sets)
 - Long Inside Passage Half Spindle
 - 2" Socket Head Machine Screws
 - Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 2 3/4"
- Extended Components:
 - Privacy Pin w/ Extension (for privacy sets)
 - Long Inside Passage Half Spindle
 - 2 1/2" Socket Head Machine Screws
 - Extended Full-Lip Strike Plate

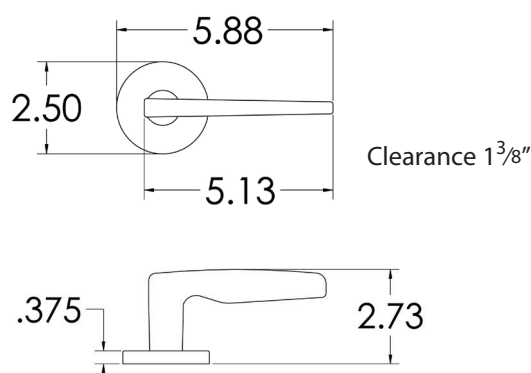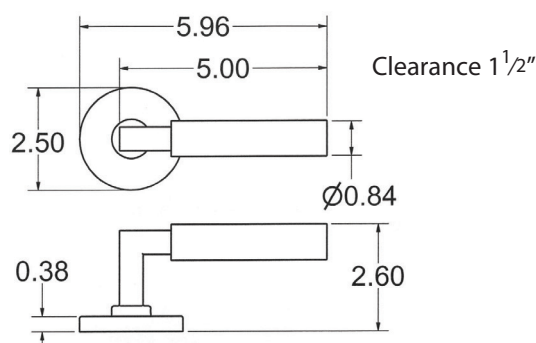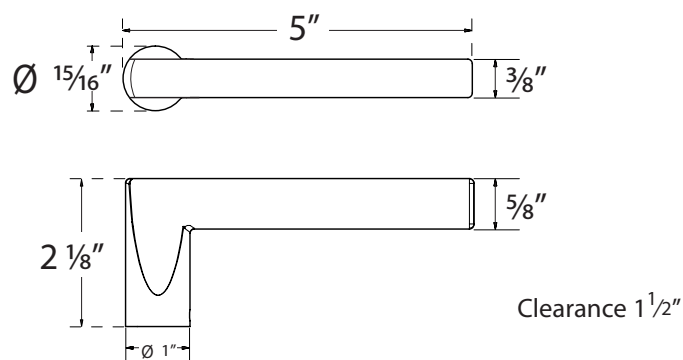

See page 16 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 $\frac{3}{8}"$ - 2"
- Standard Components:
 - Privacy Pin (for privacy sets)
 - Inside Passage Half Spindle
 - 1 $\frac{1}{2}"$ Socket Head Machine Screws
 - Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 $\frac{1}{2}"$
- Extended Components:
 - Privacy Pin w/ Extension (for privacy sets)
 - Long Inside Passage Half Spindle
 - 2" Socket Head Machine Screws
 - Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 $\frac{1}{2}"$ - 2 $\frac{3}{4}"$
- Extended Components:
 - Privacy Pin w/ Extension (for privacy sets)
 - Long Inside Passage Half Spindle
 - 2 $\frac{1}{2}"$ Socket Head Machine Screws
 - Extended Full-Lip Strike Plate




Kiel (KL)
with Square Rosette

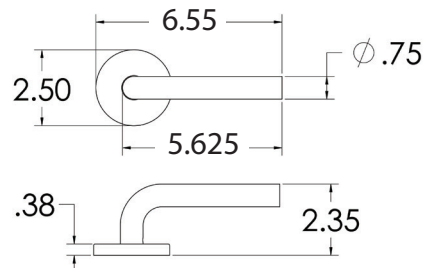

Clearance: 1¼"

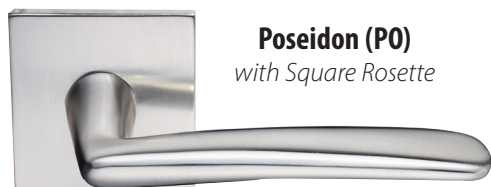


Poseidon (PO)
with Square Rosette



Clearance: 1⅜"



Stuttgart (STT)
with Disk Rosette

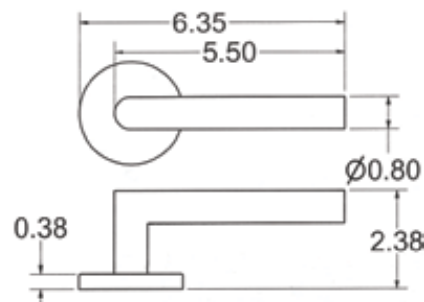

Clearance: 1¼"

See page 16 for rosette specification.

Door Thickness Specifications

- Standard Door Thickness: 1⅜" - 2"
- Standard Components:
 - Privacy Pin (for privacy sets)
 - Inside Passage Half Spindle
 - 1½" Socket Head Machine Screws
 - Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2½"
- Extended Components:
 - Privacy Pin w/ Extension (for privacy sets)
 - Long Inside Passage Half Spindle
 - 2" Socket Head Machine Screws
 - Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2½" - 2¾"
- Extended Components:
 - Privacy Pin w/ Extension (for privacy sets)
 - Long Inside Passage Half Spindle
 - 2½" Socket Head Machine Screws
 - Extended Full-Lip Strike Plate

Functions:


Passage: Lever operates from either side of door.

Privacy: Push button on the interior engages privacy. Turning the inside lever releases privacy and retracts latchbolt.

Dummy Pair: Surface mounted on threaded spindle. Requires no door prep.

Door Prep Specifications:

- Fits standard door prep-- $2\frac{1}{8}$ " face bore & 1" edge bore.
- Fits a range of door thickness from $1\frac{3}{8}$ " to 2". Thicker doors--please specify.

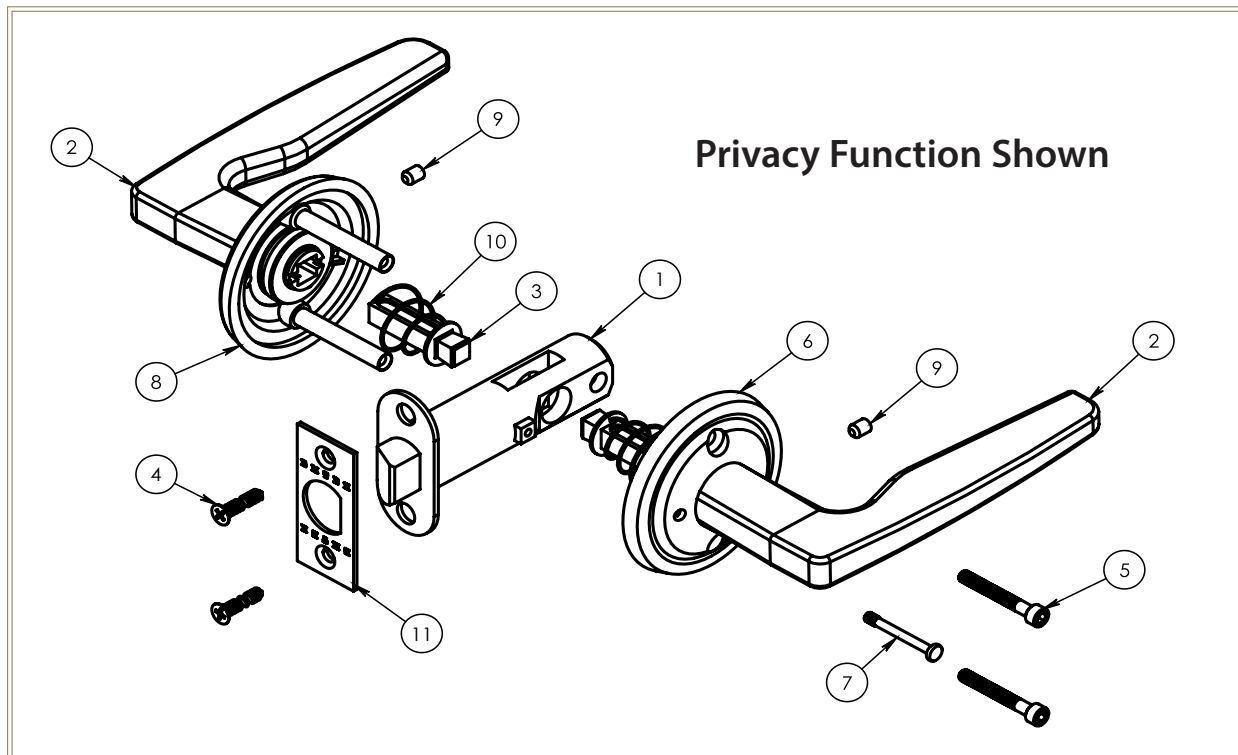**Latches:**



- 28° retraction
- 8mm hub
- Split spindles
- $2\frac{3}{8}$ " backset standard
- $2\frac{3}{4}$ " backset available--please specify
- Brass nosebolt

Strike & Face Plates:

- Strike Plate-- $1\frac{1}{2}$ "W x $2\frac{1}{4}$ "H
- Face Plate--1"W x $2\frac{1}{4}$ "H
- Full Lip strike is standard
- "T" strike optional--please specify
- Strike & faceplates are square cornered

Legend

- 1) Latch (Passage/Privacy)
- 2) Lever Handles
- 3) Spindles
- 4) Face Plate Wood Screws
- 5) Socket Hex Head Machine Screws
- 6) Inside Rosette
- 7) Privacy Pin (for Privacy Sets)
- 8) Outside Rosette
- 9) Set Screws
- 10) Spindle Spring
- 11) Latch Face Plate

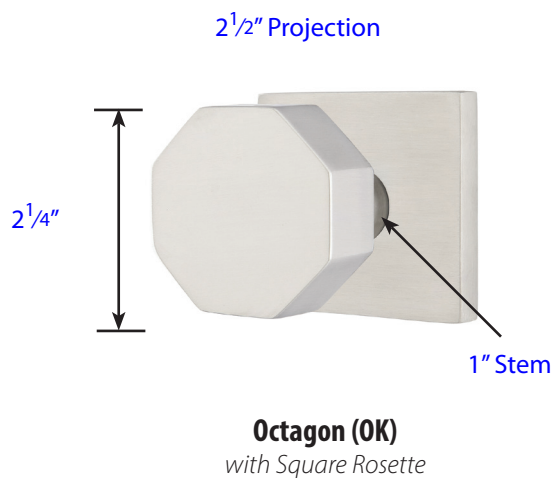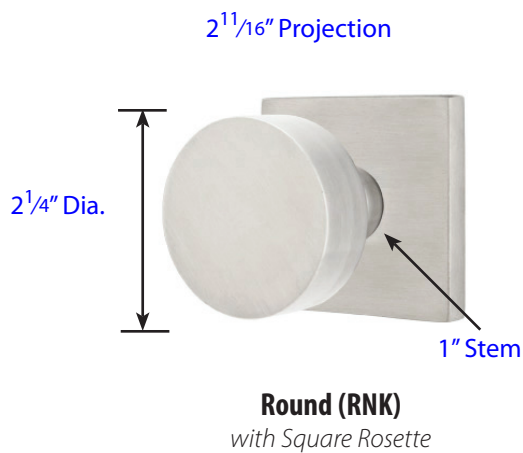

Rosettes
3/8" Thick
Beveled DISCONTINUED

2 ⁷ / ₁₆ " Dia.
Disk

2 ¹ / ₂ " Dia.
Square


2 ¹ / ₂ " x 2 ¹ / ₂ "

Door Thickness Specifications


- Standard Door Thickness: 1³/₈" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1¹/₄" Socket Head Machine Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2¹/₂"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Socket Head Machine Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2¹/₂" - 2³/₄"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2¹/₂" Socket Head Machine Screws
- Extended Full-Lip Strike Plate

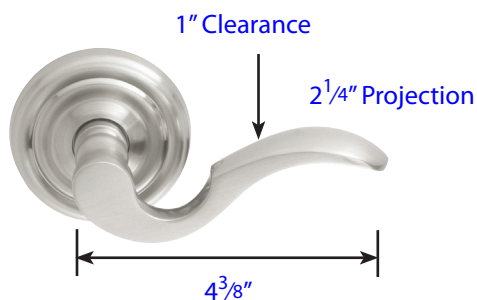


Cortina (C)
with Regular Rosette

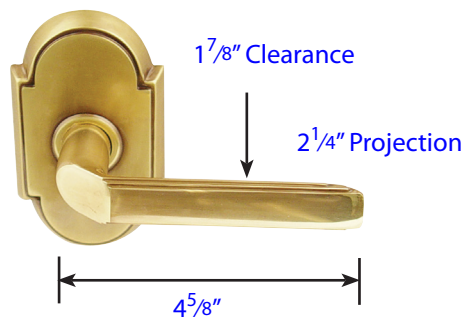

Milano (M)
with #8 Rosette

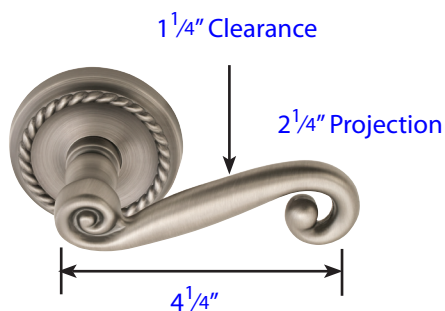

Rustic (R)
with Rope Rosette

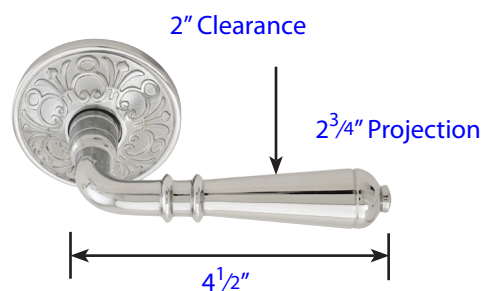

Turino (T)
with Lancaster Rosette


See page 19 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

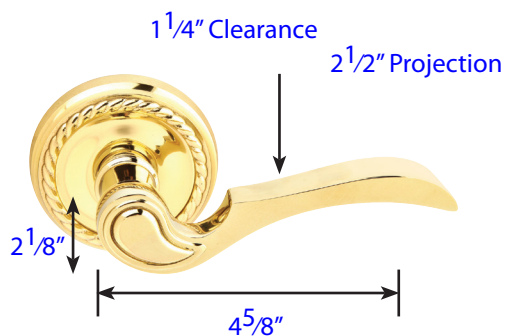


Coventry (CV)
with Rope Rosette

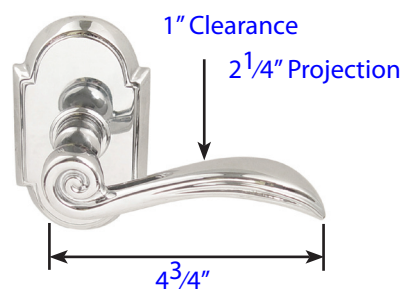

Elan (EN)
with #8 Rosette

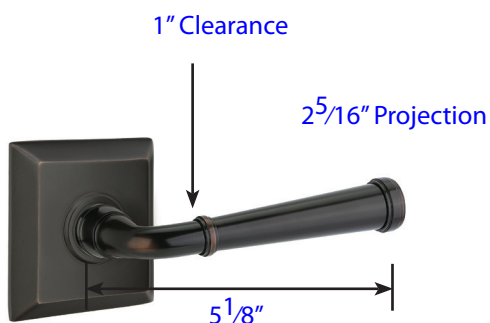

Merrimack (ME)
with Quincy Rosette

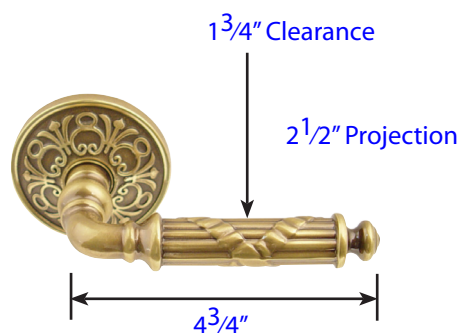

Ribbon & Reed (RBL)
with Lancaster Rosette

See page 19 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate


Rope (RL)

with Rope Rosette

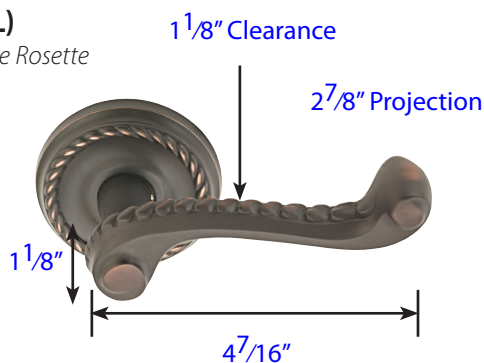


Santa Fe (SF)

with Regular Rosette

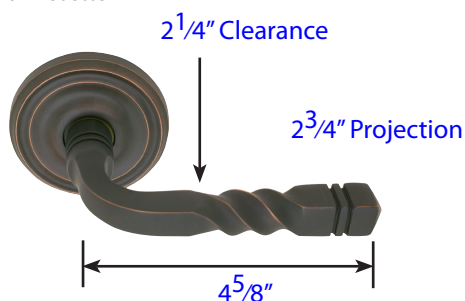

Wembley (WM)

with Regular Rosette

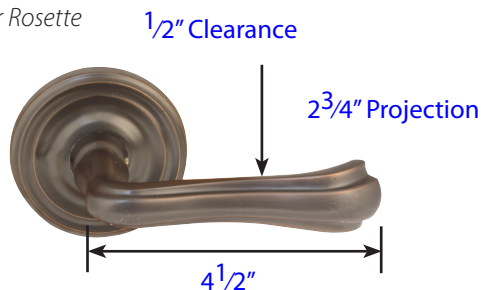

Rosettes

3/8" Thick

Regular



2 3/4" Dia.

Rope



2 3/4" Dia.

Rectangular



4 3/8" x 2 9/16"

Quincy



2 1/2" x 2 1/2"

Lancaster



2 3/4" Dia.

Ribbon & Reed



2 3/4" Dia.

#8



4 3/8" x 2 9/16"

7/16" Thick

Oval



4 1/2" x 2 1/2"

Wilshire



3" x 2 1/2"

Hammered



2 3/4" x 2 3/4"

Porcelain



2 1/2" x 2 1/2"

1/2" Thick

Arts & Crafts
Rectangular



4" x 2 1/2"

Door Thickness Specifications

• Standard Door Thickness: 1 1/4" - 2"
Standard Components:

- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

• **Extended** Door Thickness: 2" - 2 1/2"


Extended Components:

- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


• **Extended** Door Thickness: 2 1/2" - 3"

Extended Components:


- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

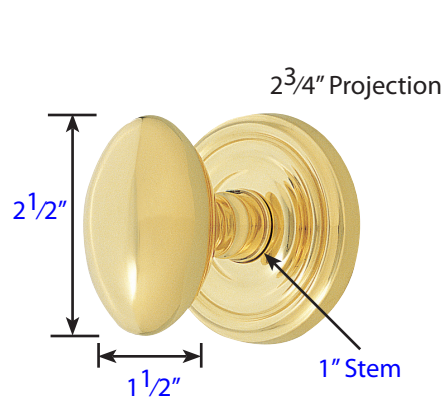


Egg (E)
with Regular Rosette

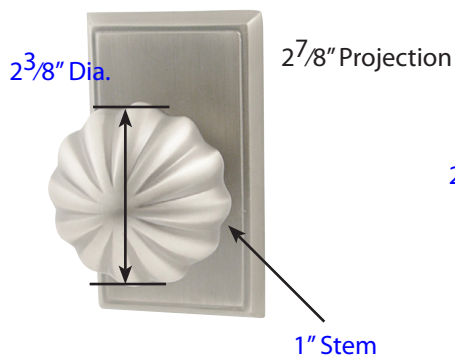


Melon (MN)
with Rectangular Rosette

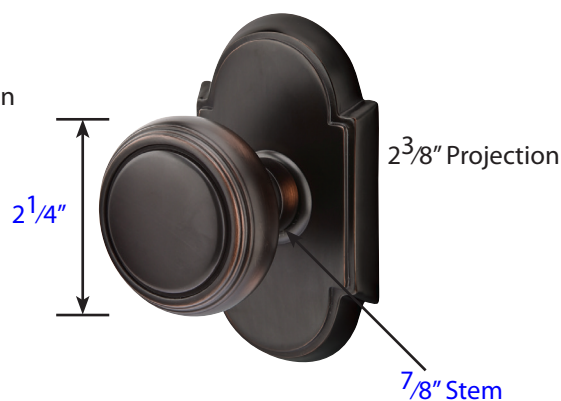

Norwich (NW)
with #8 Rosette

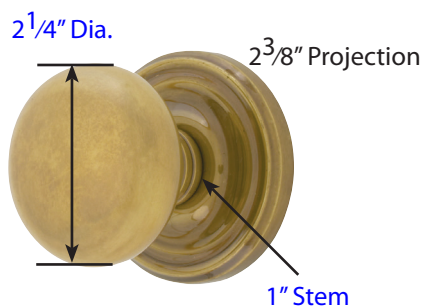

Providence (P)
with Regular Rosette

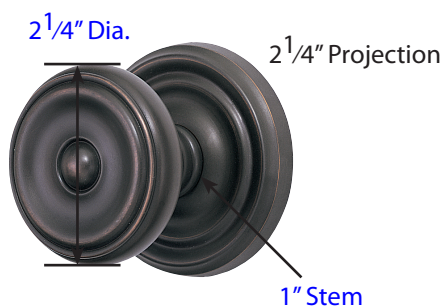

Waverly (W)
with Regular Rosette


See page 19 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

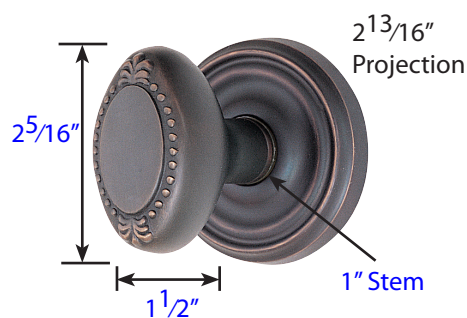


Beaded Egg (BE)
with Regular Rosette

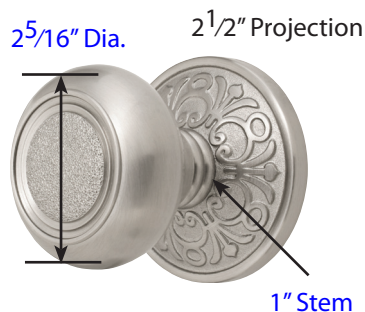


Belmont (BT)
with Lancaster Rosette

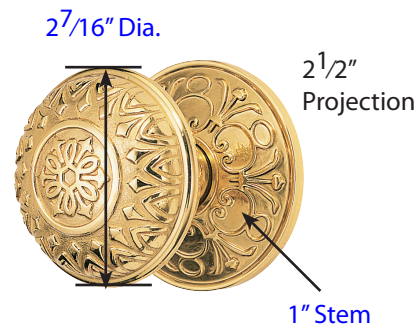


Lancaster (LN)
with Lancaster Rosette

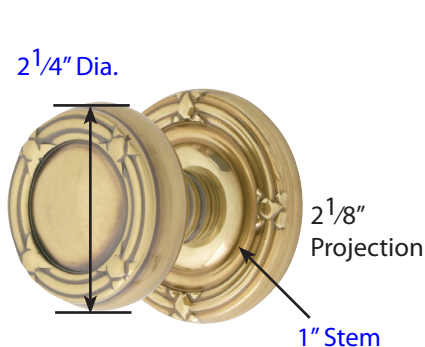

Ribbon & Reed (RBK)
with Ribbon & Reed Rosette

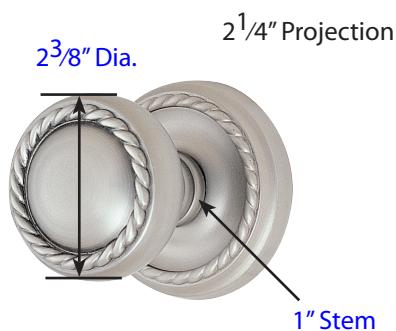

Rope (RK)
with Rope Rosette

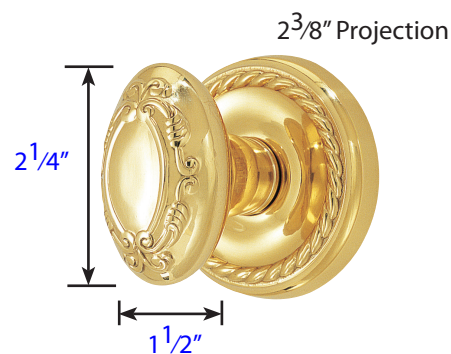

Victoria (V)
with Rope Rosette


See page 19 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

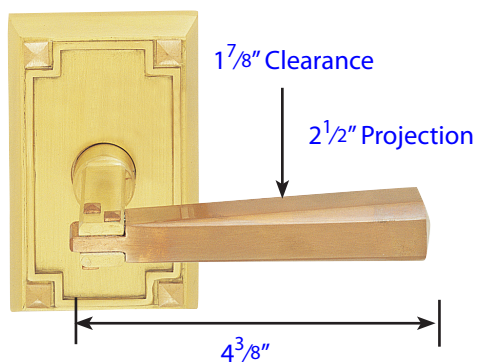

Arts & Crafts (AC)
with Arts & Crafts
Rectangular Rosette

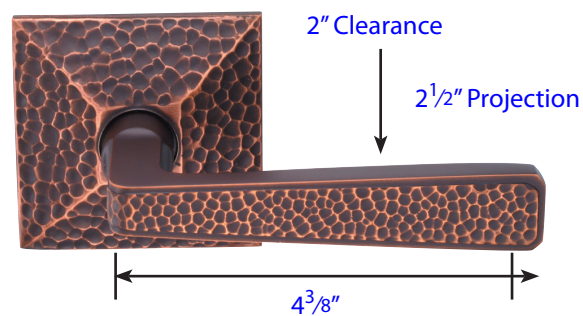

Hammered (HM)
with Hammered Rosette

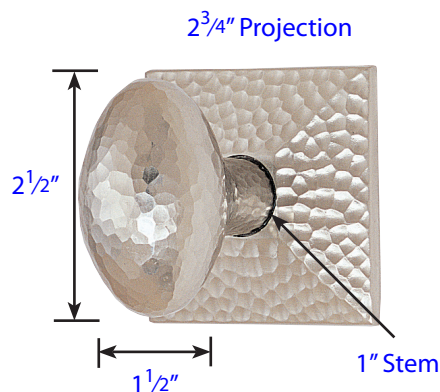

Hammered Egg (HE)
with Hammered Rosette



See page 19 for rosette specification.

Door Thickness Specifications

- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

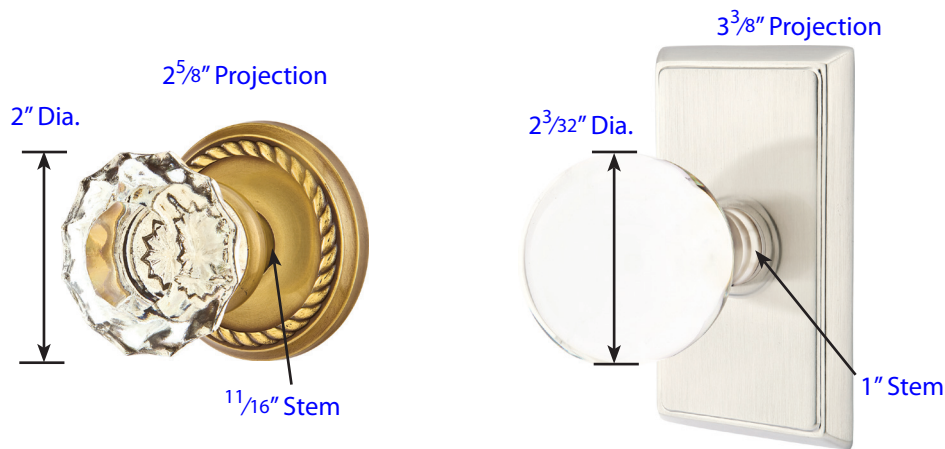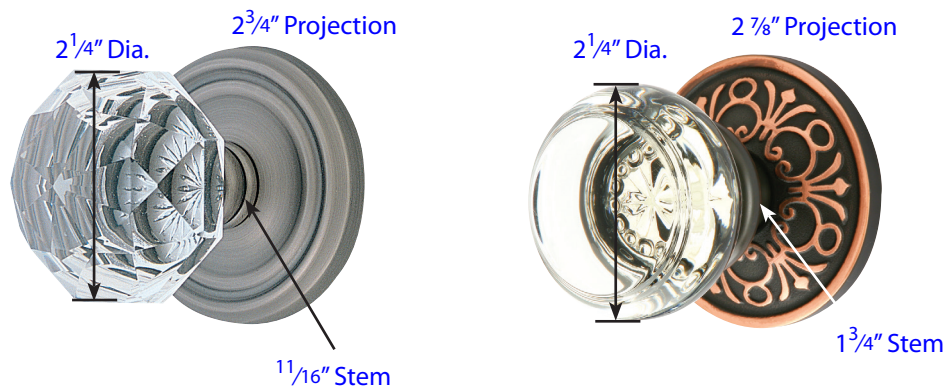**Astoria Clear (AS)***with Rope Rosette***Bristol (BL)***with Rectangular Rosette***Diamond (CK)***with Regular Rosette***Georgetown (GT)***with Lancaster Rosette*






See page 19 for rosette specification.

Door Thickness Specifications

- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

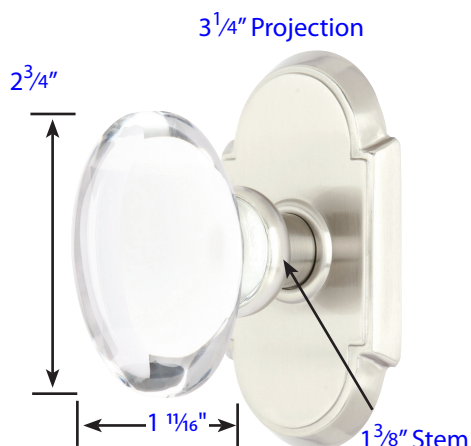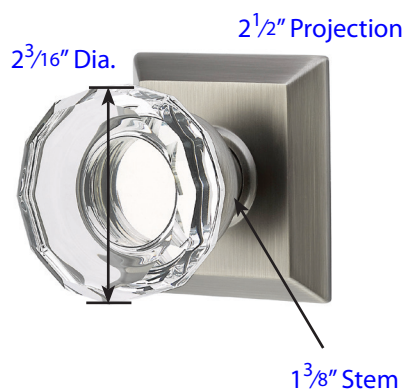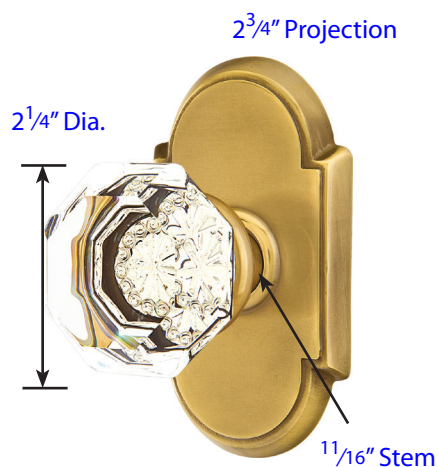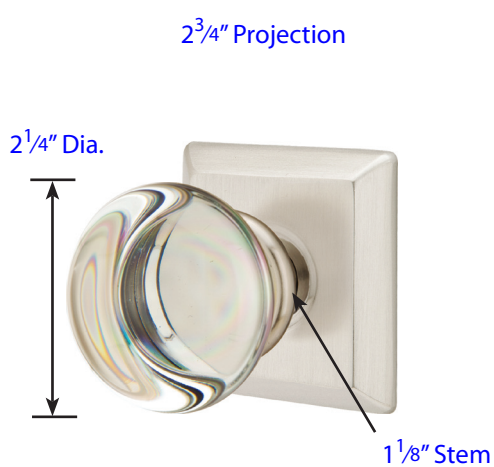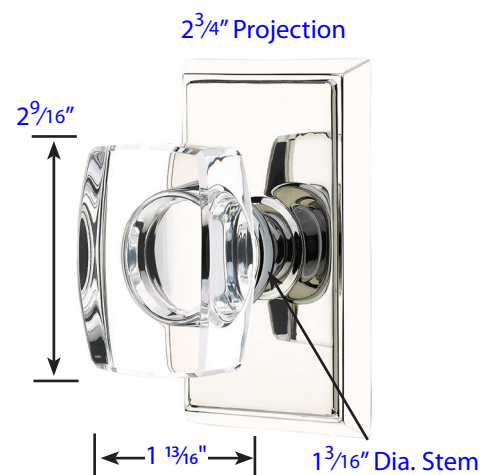**Hampton (HT)***with #8 Rosette***Lowell Crystal (LW)***with Quincy Rosette***Old Town - Clear (OT)***with #8 Rosette***Providence Crystal (PC)***with Quincy Rosette***Windsor (WS)***with Rectangular Rosette*

See page 19 for rosette specification.


Door Thickness Specifications

- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

PORCELAIN KNOBSETS WITH PORCELAIN ROSETTES

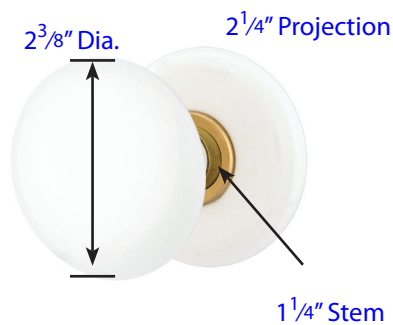


Ice White (IW)
with Porcelain Rosette




Ebony (EB)
with Porcelain Rosette

PORCELAIN KNOBSETS WITH BRASS ROSETTES

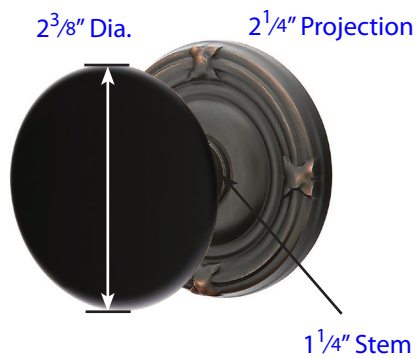

Ebony (EB)
with Ribbon & Reed Rosette

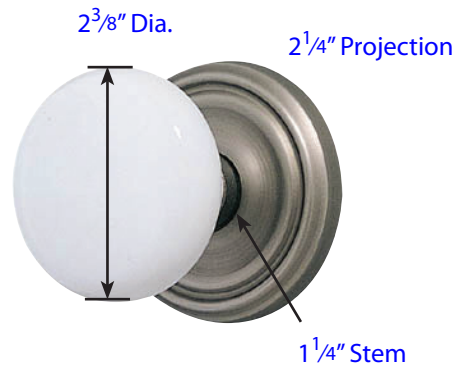

Ice White (IW)
with Regular Rosette


See page 19 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1¹/₄" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1¹/₂" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2¹/₂"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2¹/₂" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2¹/₂" Rosette Screws
- Extended Full-Lip Strike Plate

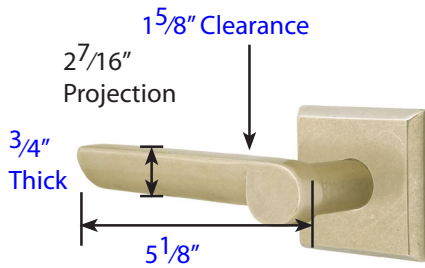


Aurora (AR)
with #6 Rosette

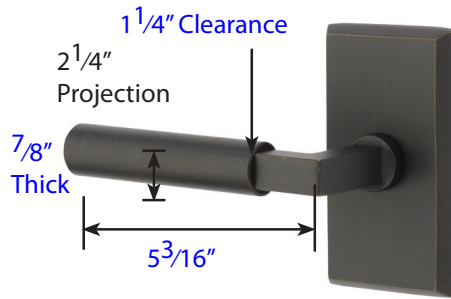


Bryce (BR)
with #3 Rosette

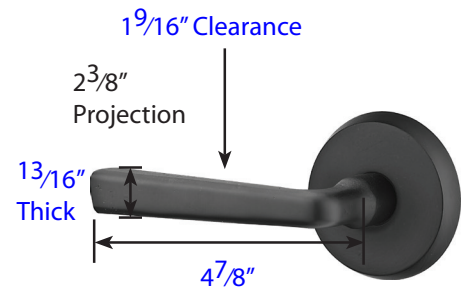

Cimarron (CR)
with #2 Rosette

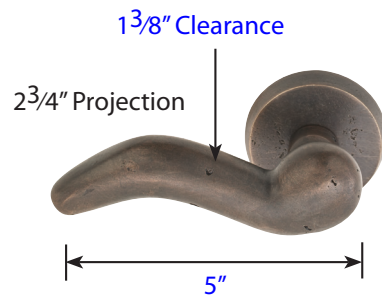

Cody (CD)
with #2 Rosette

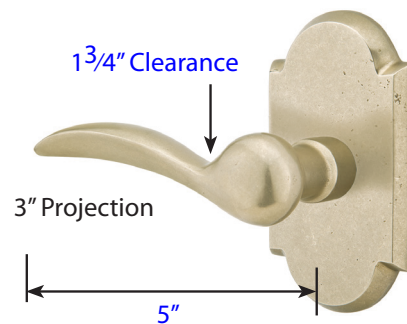

Durango (D)
with #1 Rosette


See page 28 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

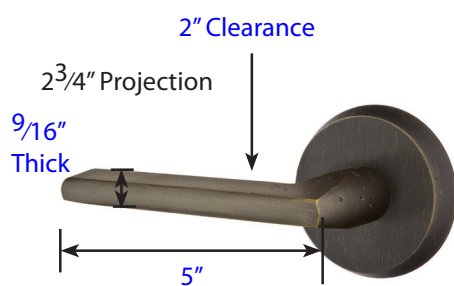


Lariat (LR)
with #2 Rosette

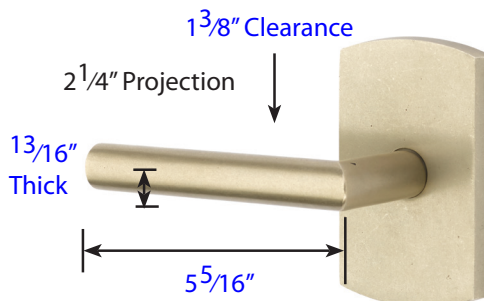


Mariposa (MA)
with #4 Rosette

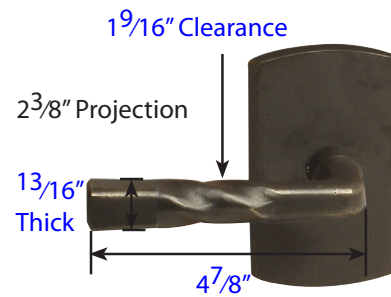

Montrose (MT)
with #4 Rosette

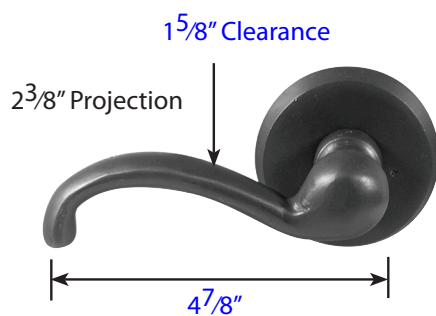

Teton (TT)
with #2 Rosette

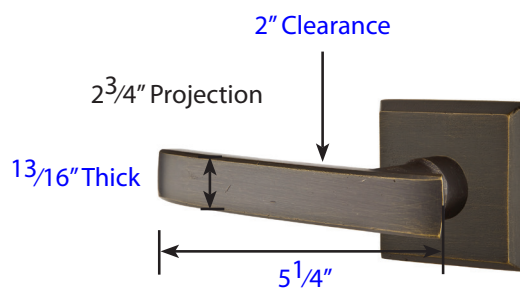

Yuma (YM)
with #6 Rosette


See page 28 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

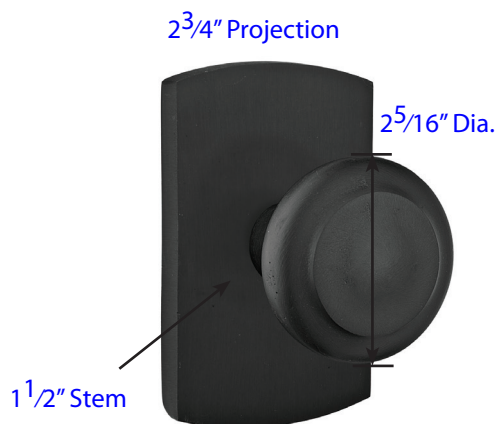


Butte (BU)
with #4 Rosette

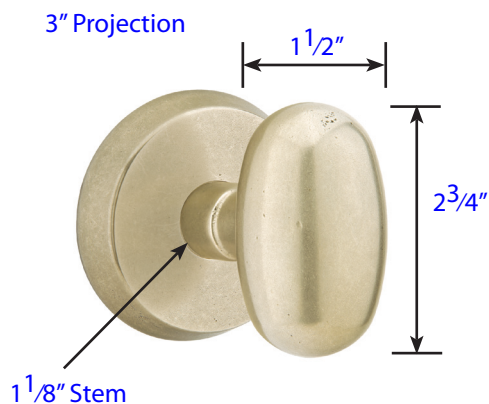

Bronze Egg (BZE)
with #2 Rosette

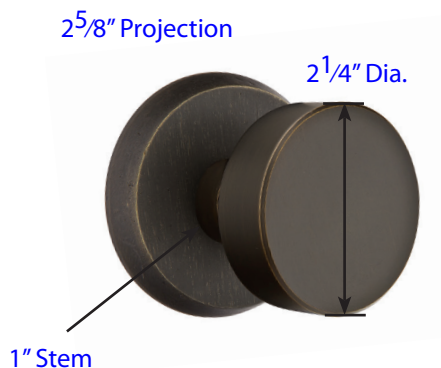

Round (BZRN)
with #2 Rosette

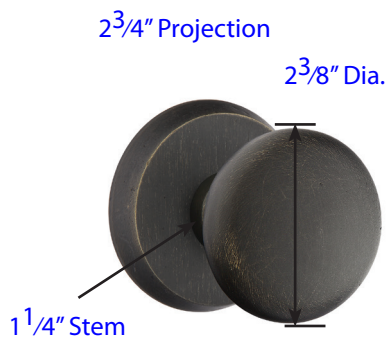

Winchester (WC)
with #2 Rosette

Rosettes

3/16" Thick

#1



4 1/2" x 2 1/2"

#2



2 3/4" Dia.

#3



4 1/2" x 2 1/2"

1/2" Thick

#4



4 1/2" x 2 13/16"

3/16" Thick

#6



2 1/2" x 2 1/2"

Door Thickness Specifications

- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:


- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:


- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:

- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

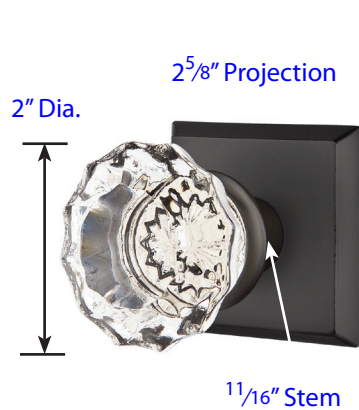


Astoria (AS)
with #6 Rosette

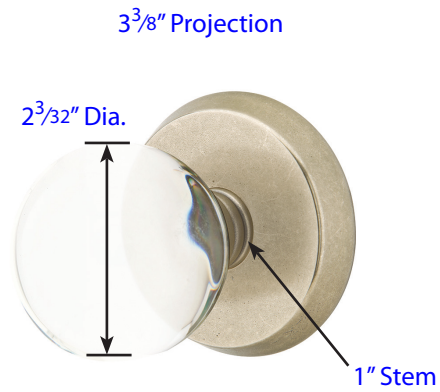

Bristol (BL)
with #2 Rosette



Diamond Crystal (CK)
with #3 Rosette

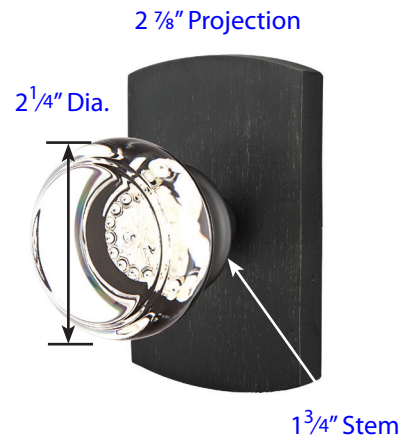

Georgetown (GT)
with #4 Rosette


See page 28 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

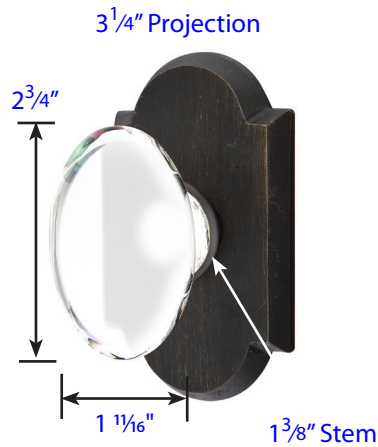


Hampton (HT)
with #1 Rosette

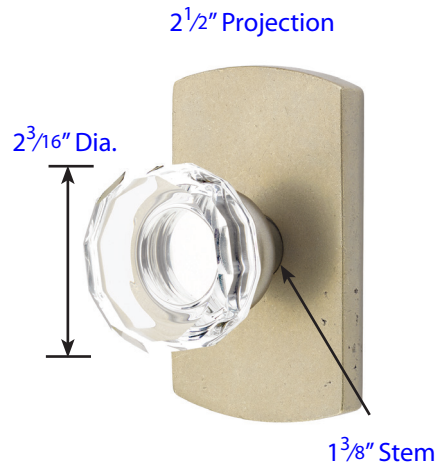


Lowell (LW)
with #4 Rosette

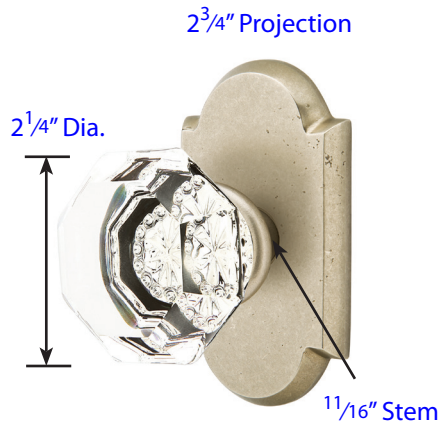

Old Town - Clear (OT)
with #1 Rosette

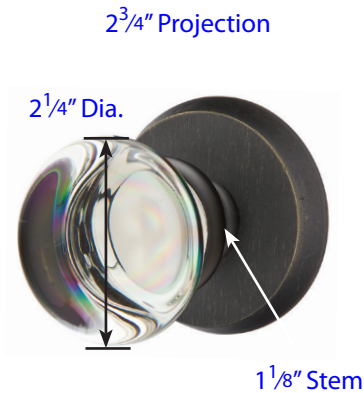

Providence (PC)
with #2 Rosette

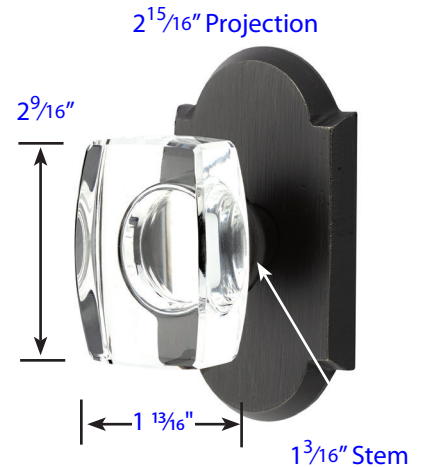

Windsor (WS)
with #1 Rosette


See page 28 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

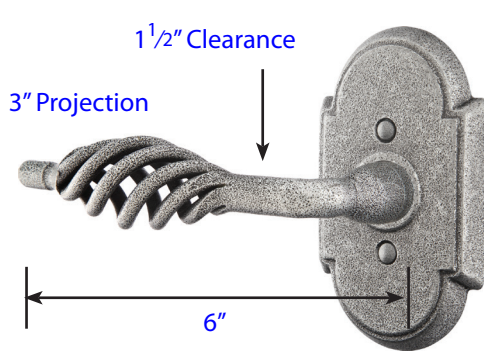

Lafayette (L)
with #1 Rosette
DISCONTINUED

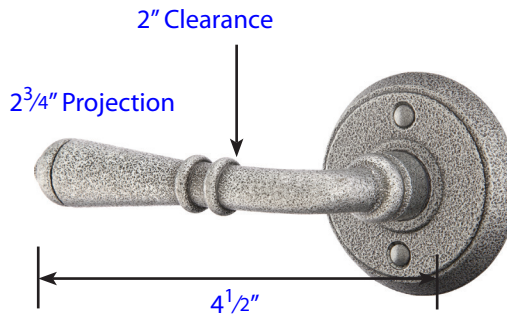

Normandy (N)
with #2 Rosette

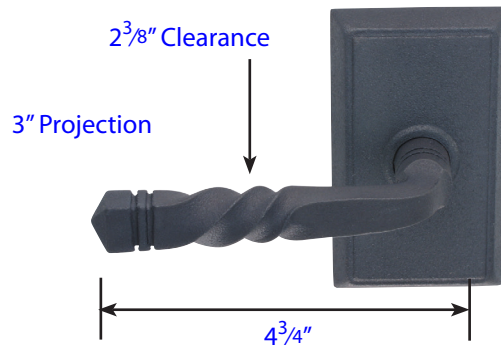

San Carlos (SC)
with #3 Rosette

Rosettes

3/8" Thick

#1



4 3/8" x 2 5/16"

#2



2 5/8" Dia.

#3




4 3/8" x 2 5/16"

Door Thickness Specifications


- Standard Door Thickness: 1 3/8" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

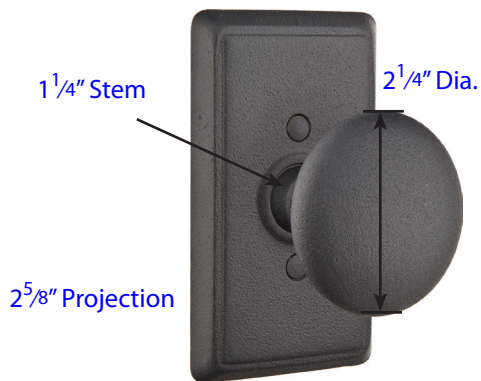


Jamestown (J)
with #3 Rosette

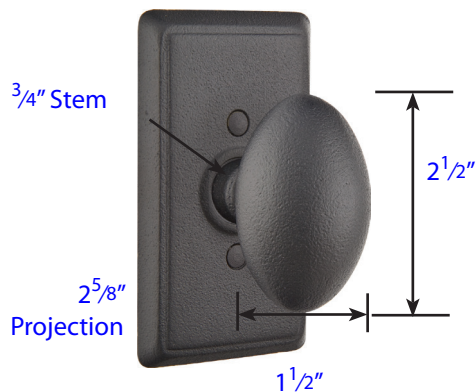

Savannah (SV)
with #3 Rosette

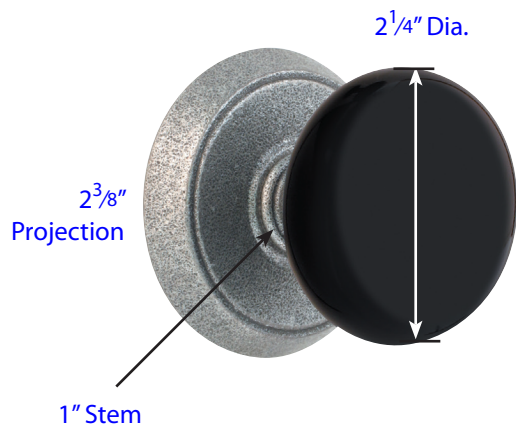

Madison Black (MB)
with #2 Rosette

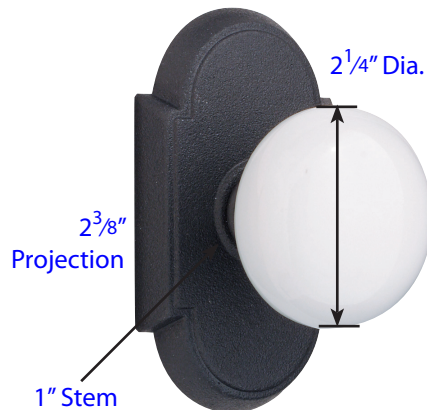

Madison Ivory (MI)
with #1 Rosette


See page 31 for rosette specification.

Door Thickness Specifications


- Standard Door Thickness: 1 3/8" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate


- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

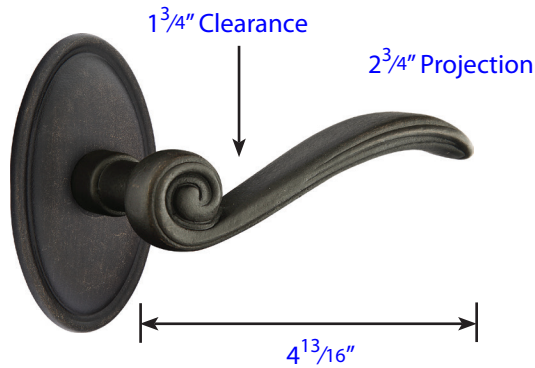


Medici (MDI)
with #14 Rosette

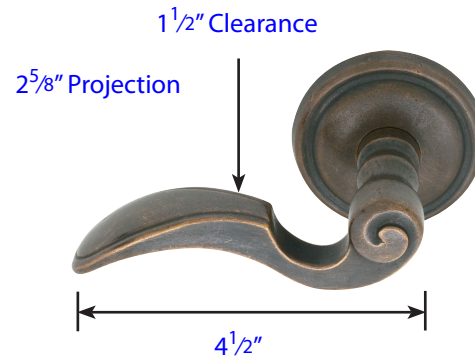

Napoli (NA)
with #12 Rosette

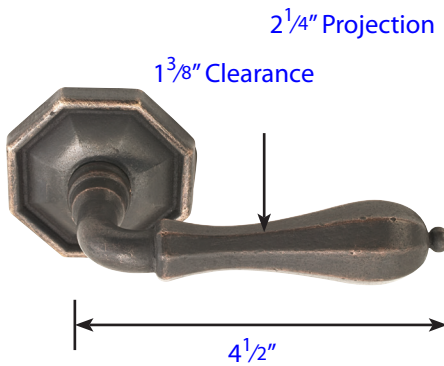

Octagon (OCL)
with #15 Rosette

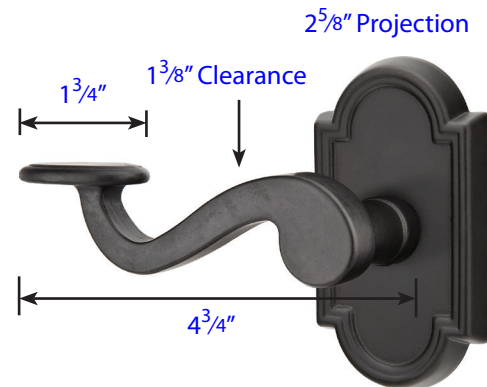

Padua (PD)
with #11 Rosette


See page 34 for rosette specification.

Door Thickness Specifications

- Standard Door Thickness: 1 3/8" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate

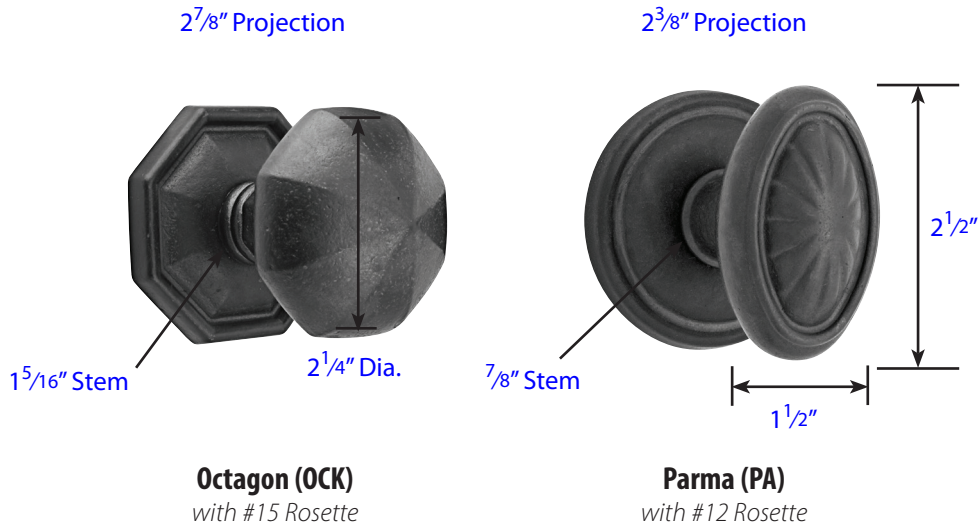

Rosettes

7/16" Thick

#11



4¹/₂" x 2¹/₂"

#12



2⁵/₈" Dia.

#14



4¹/₂" x 2³/₈"

#15



2¹/₂" x 2¹/₂"

Door Thickness Specifications

- Standard Door Thickness: 1³/₈" - 2"
- Standard Components:

- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1¹/₂" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2¹/₂"
- Extended Components:

- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2¹/₂" - 3"
- Extended Components:

- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2¹/₂" Rosette Screws
- Extended Full-Lip Strike Plate